




Hex Cap Screws, Grade 5, Zinc Plated

The information below lists the required dimensional, chemical and physical characteristics of the products in this purchase order. If the order received does not meet these requirements, it may result in a supplier corrective action request, which could jeopardize your status as an approved vendor. Unless otherwise specified, all referenced consensus standards must be adhered to in their entirety.

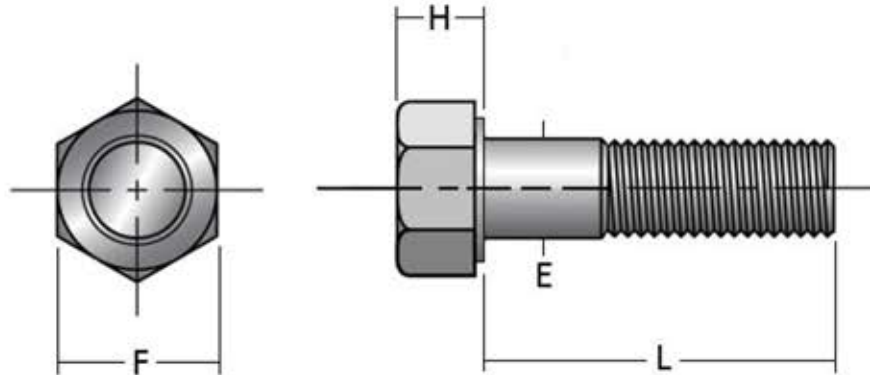

Size (Inch)	E		F		H	
	Full Size Body Diameter		Width Across Flats		Head Height	
	Max.	Min.	Max.	Min.	Max.	Min.
1/4	0.2500	0.2450	0.438	0.428	0.163	0.150
5/16	0.3125	0.3065	0.500	0.489	0.211	0.195
3/8	0.3750	0.3690	0.562	0.551	0.243	0.226
7/16	0.4375	0.4305	0.625	0.612	0.291	0.272
1/2	0.500	0.4930	0.750	0.736	0.323	0.302
9/16	0.5625	0.5545	0.812	0.798	0.371	0.348
5/8	0.6250	0.6170	0.938	0.922	0.403	0.378
3/4	0.7500	0.7410	1.125	1.100	0.483	0.455
7/8	0.8750	0.8660	1.312	1.285	0.563	0.531
1	1.0000	0.9900	1.500	1.469	0.627	0.591
1 1/8	1.1250	1.1140	1.688	1.631	0.718	0.658
1 1/4	1.2500	1.2390	1.875	1.812	0.813	0.749
1 1/2	1.5000	1.4880	2.250	2.175	0.974	0.902

Length and Thread Length per ASME B18.2.1

Specification Requirements:

- Dimensions: ASME B18.2.1
- Material & Mechanical Properties: Grade 5 per SAE J429
- Thread Requirements: ASME B1.1, UNC & UNF, Class 2A
- Head Marking: Manufacturer ID and 3 radial lines 120 degrees apart.
- Finish: Fe/Zn 3AN per ASTM F1941/F1941M
- Material Test Reports: The MTR must have documented lot traceability, dimensional results, full chemical test results and full mechanical test results to the specification(s) above. In addition, the MTR shall be in full compliance with Fastenal's MTR Requirements.